

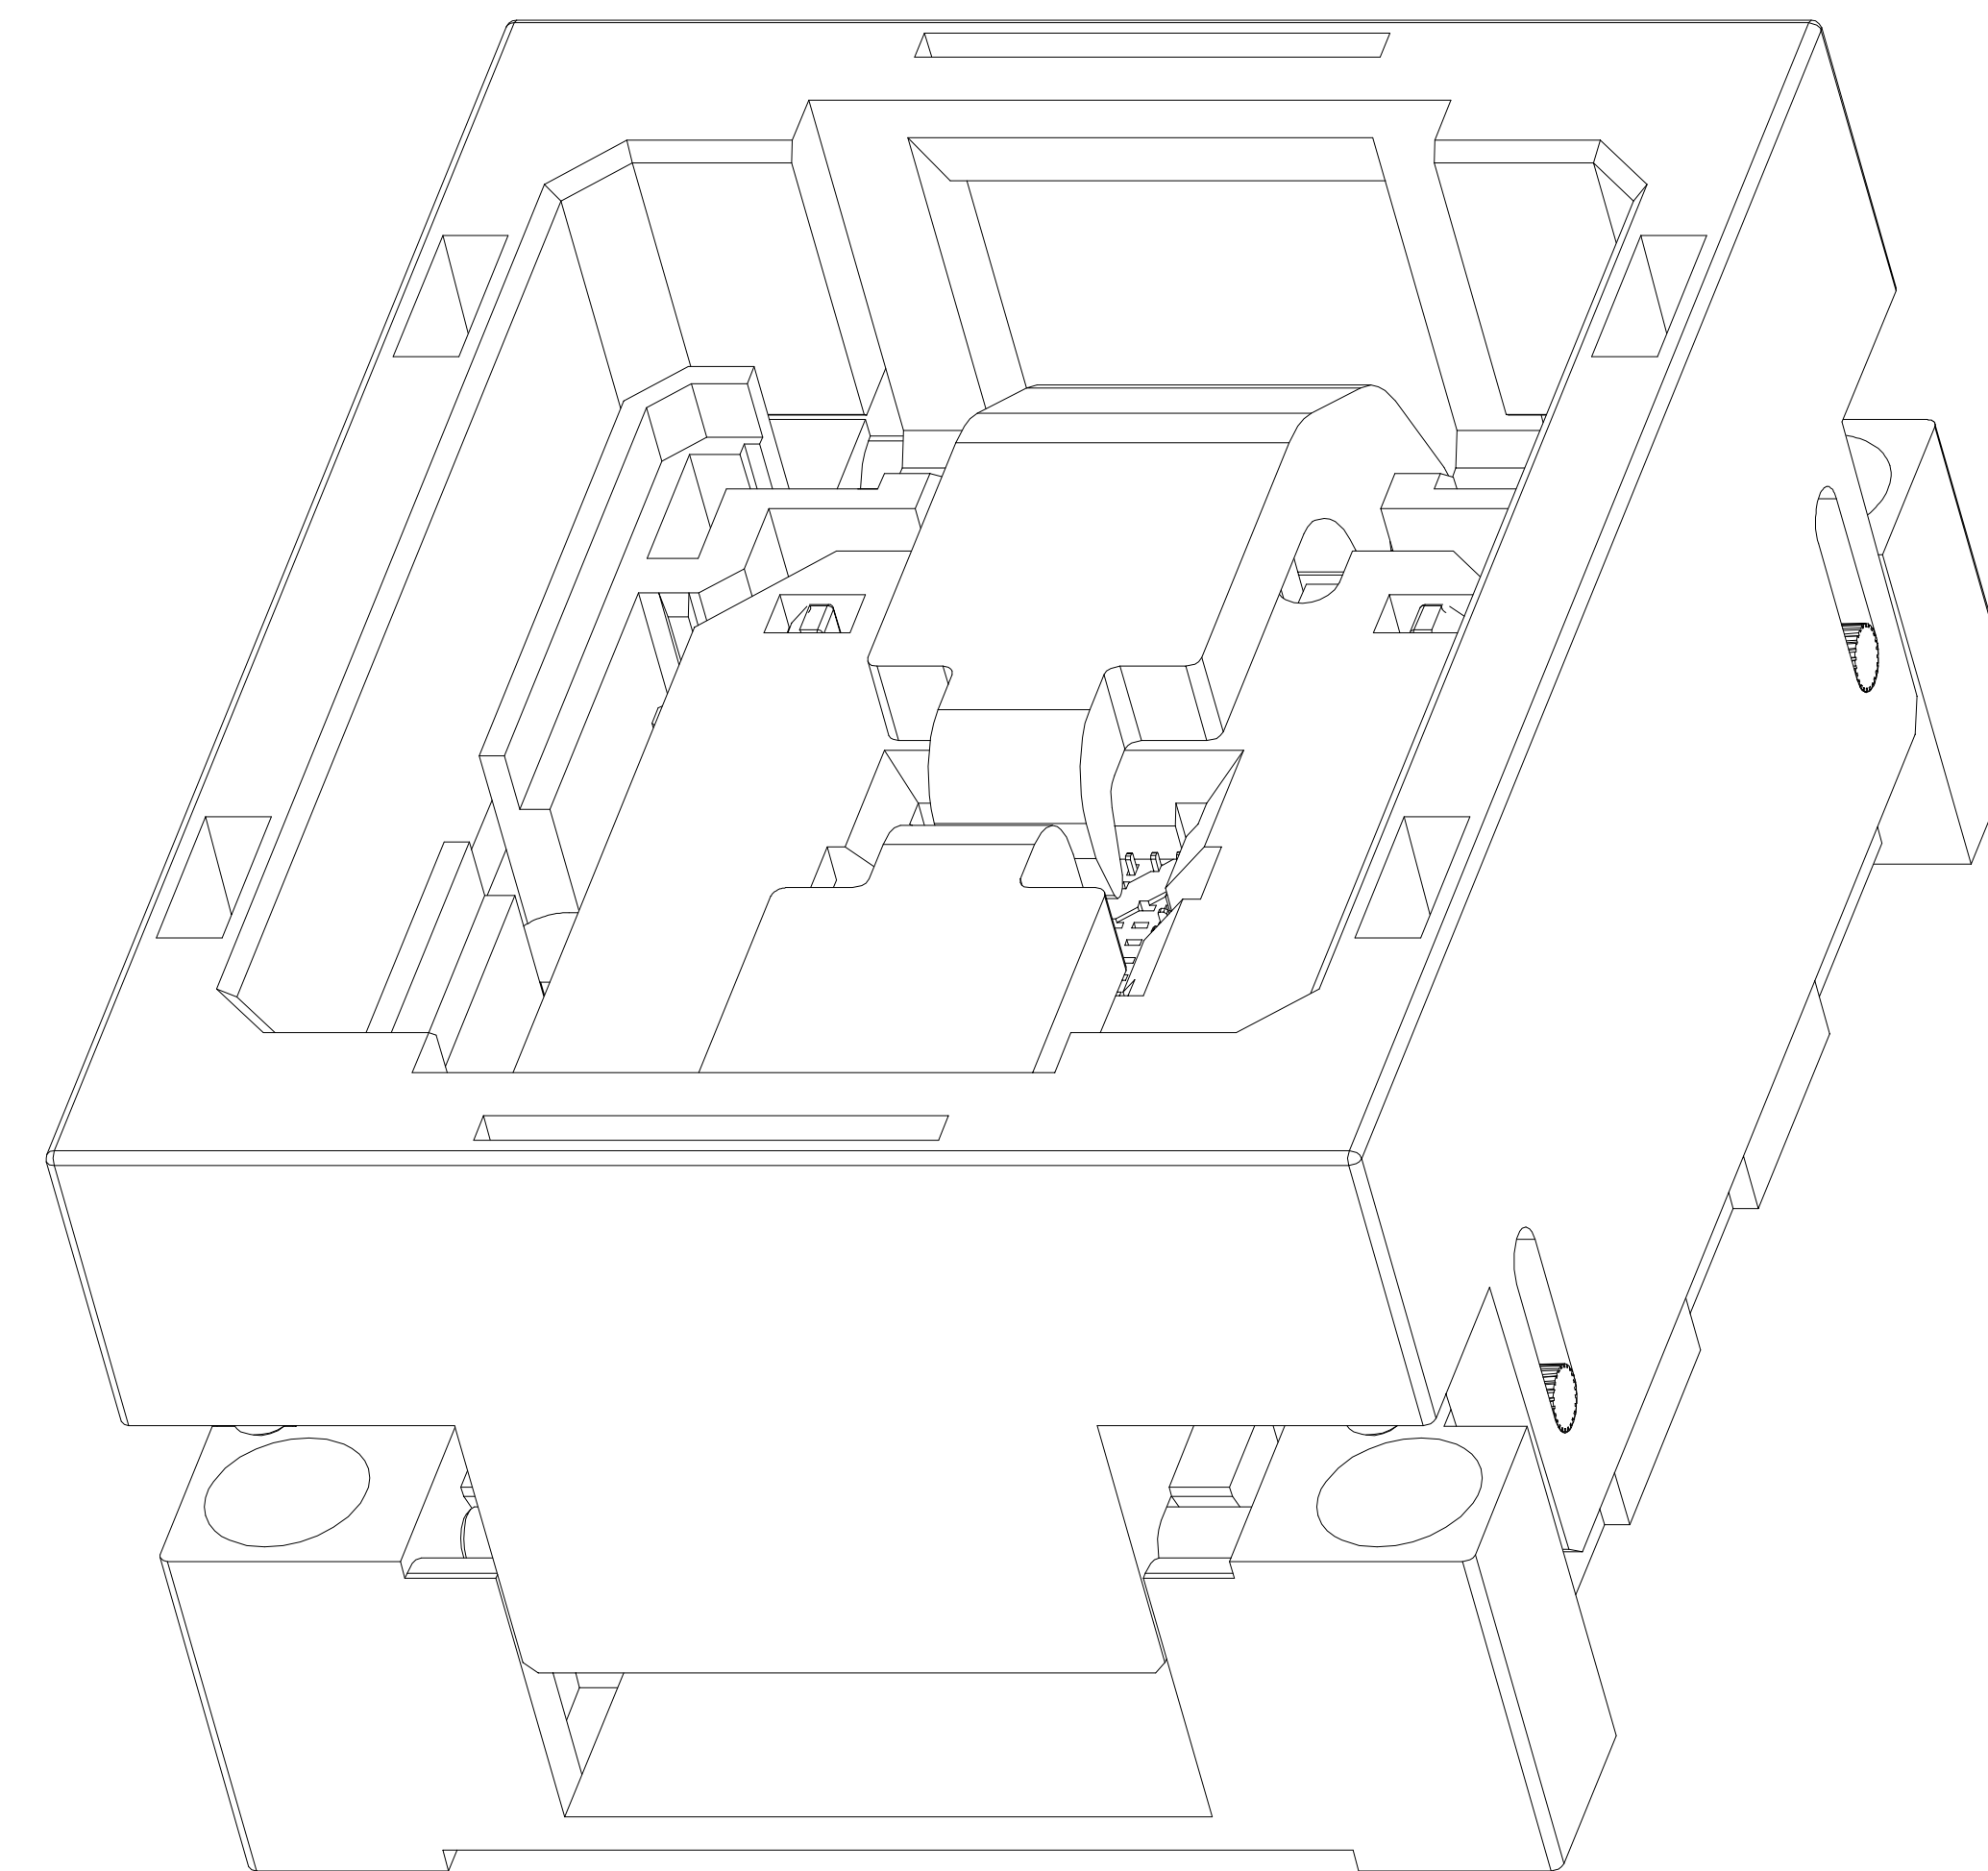
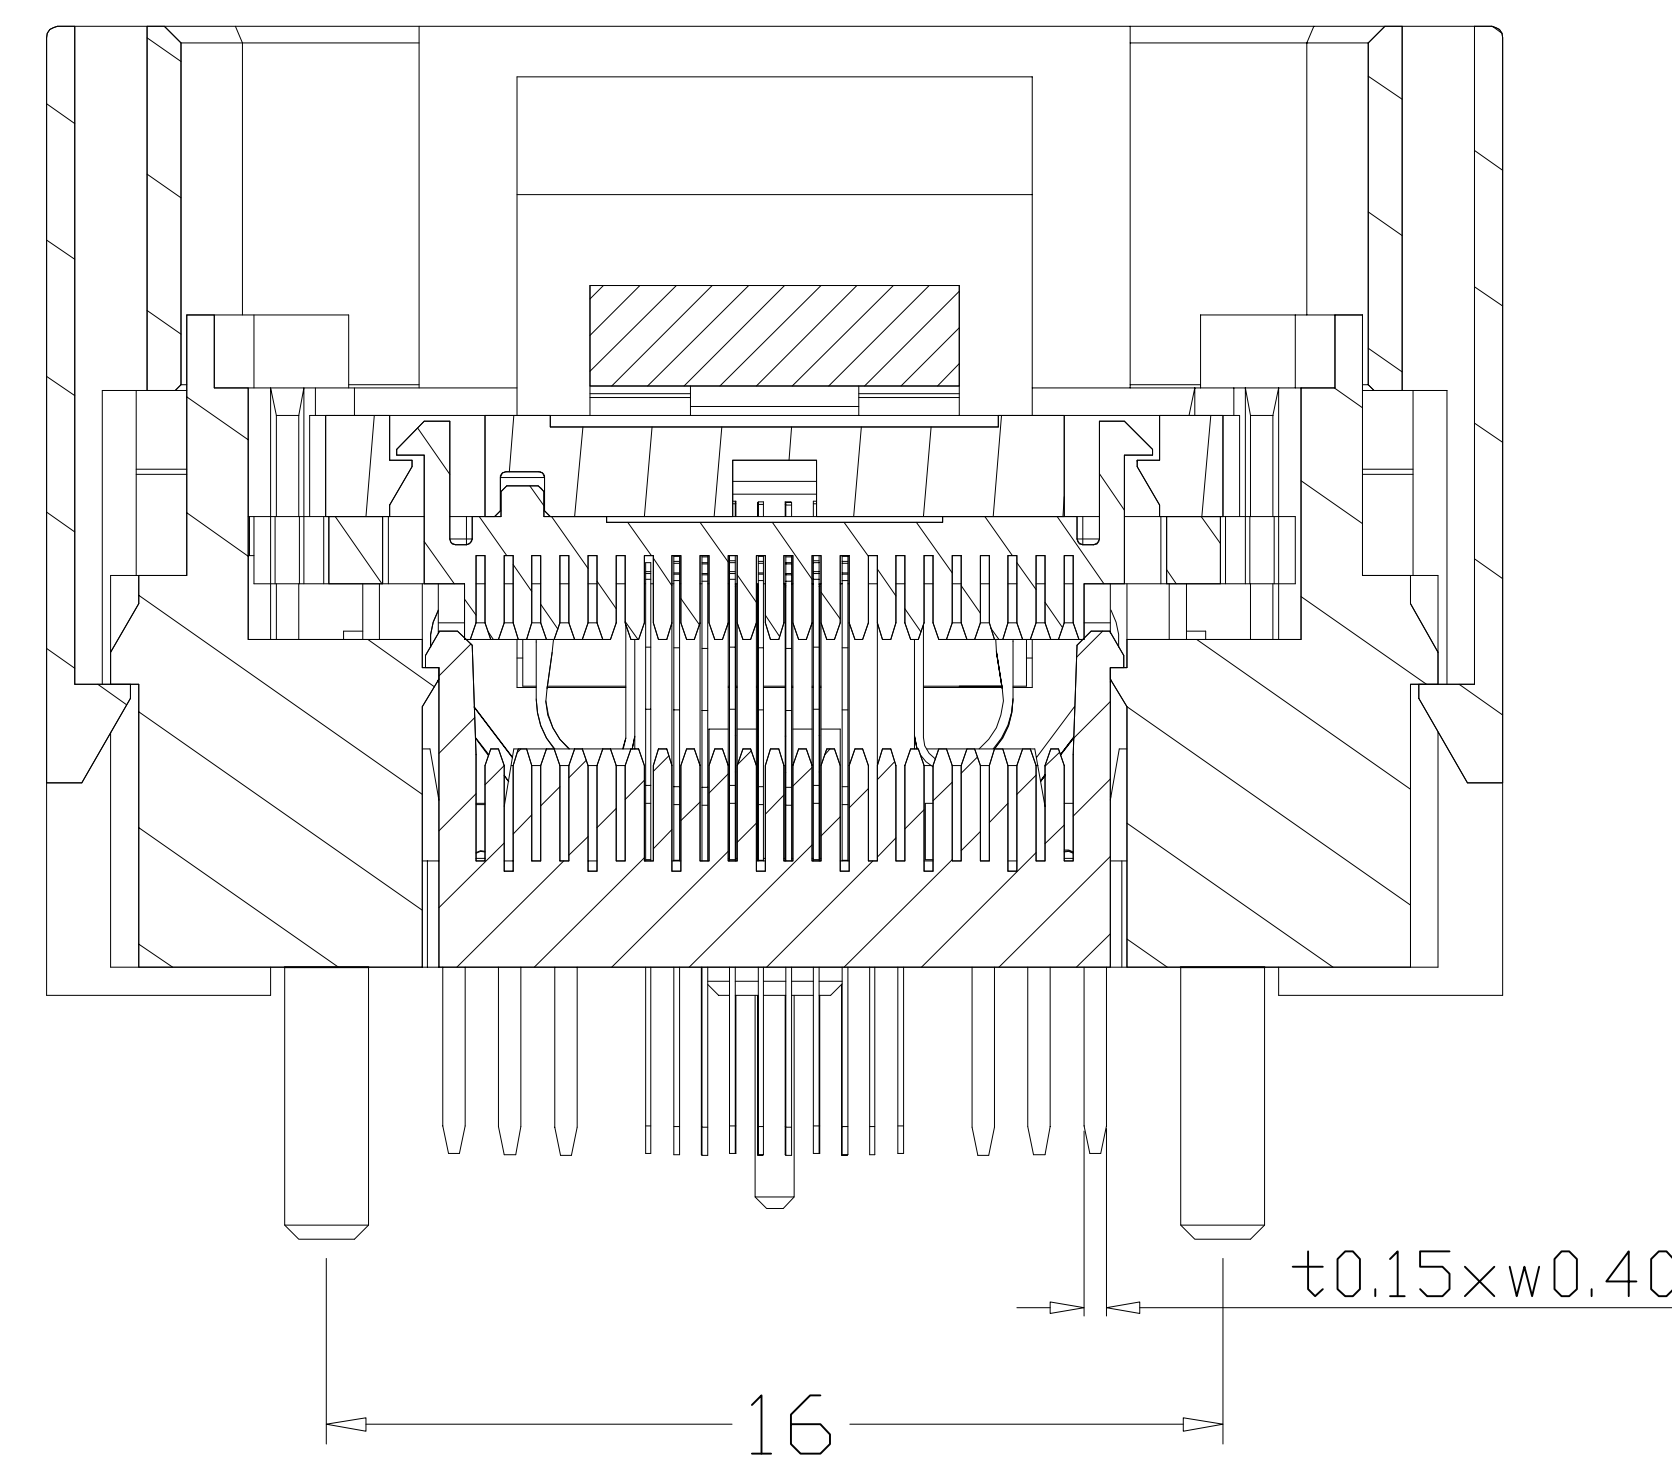
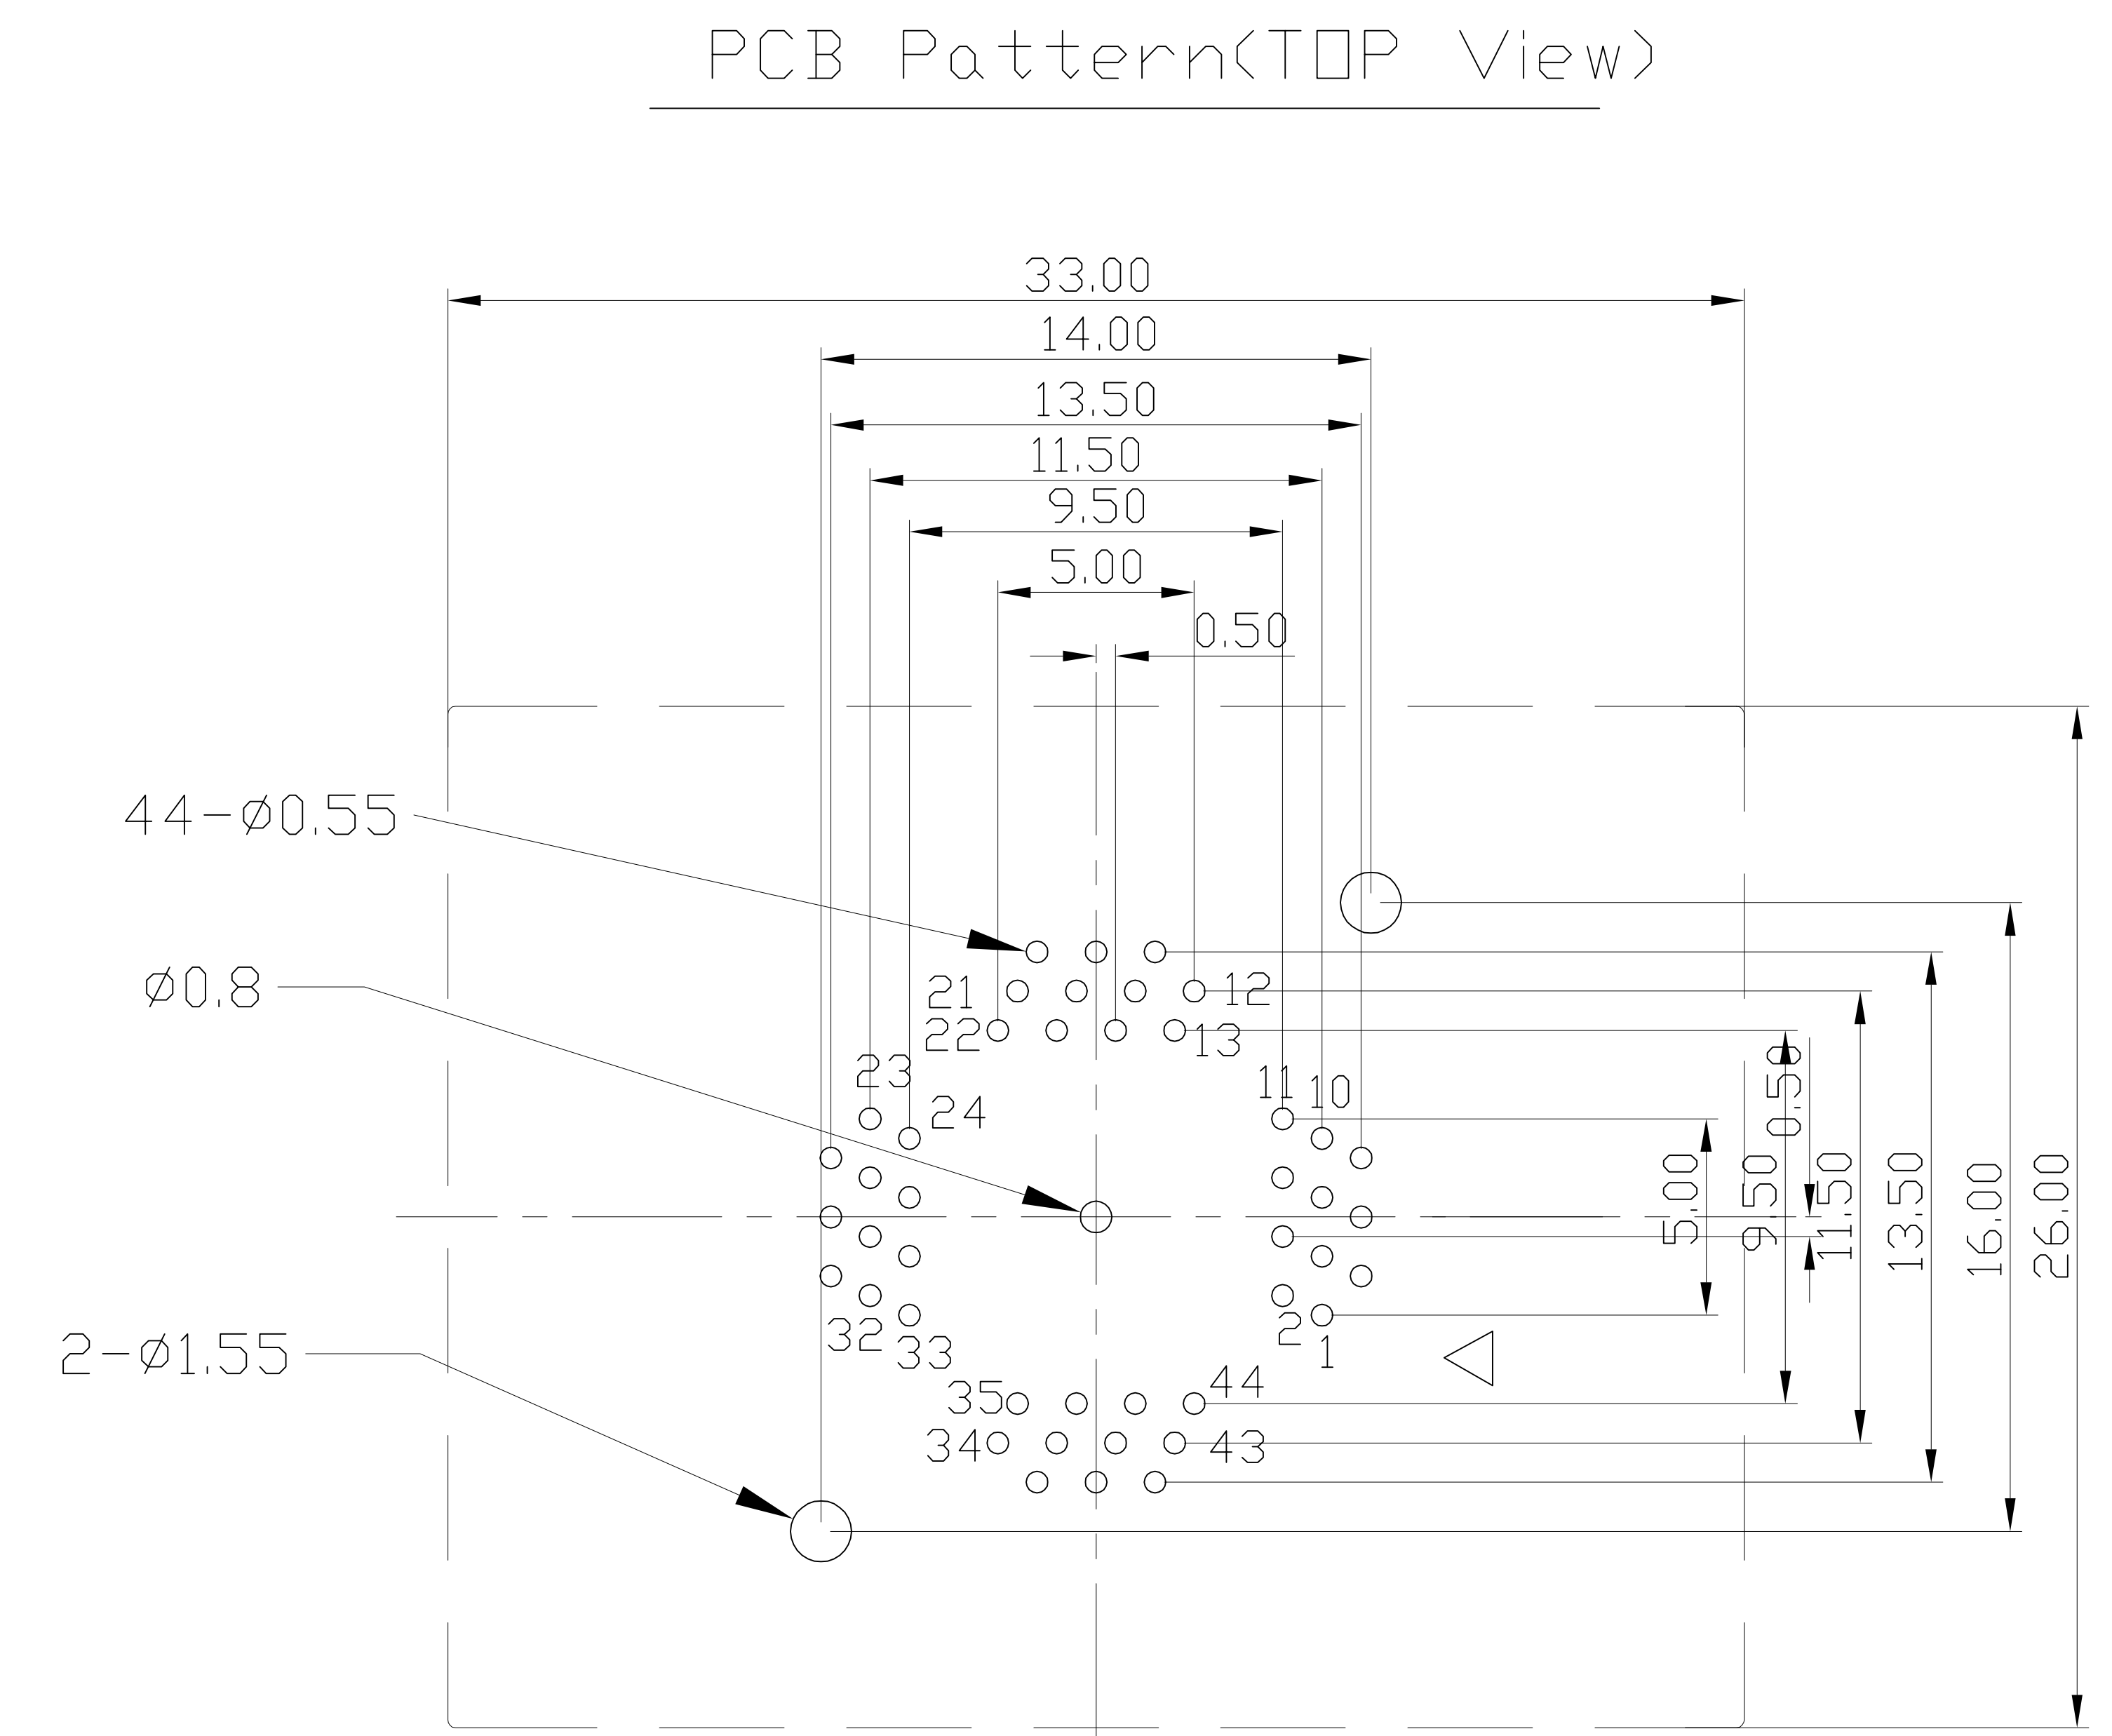
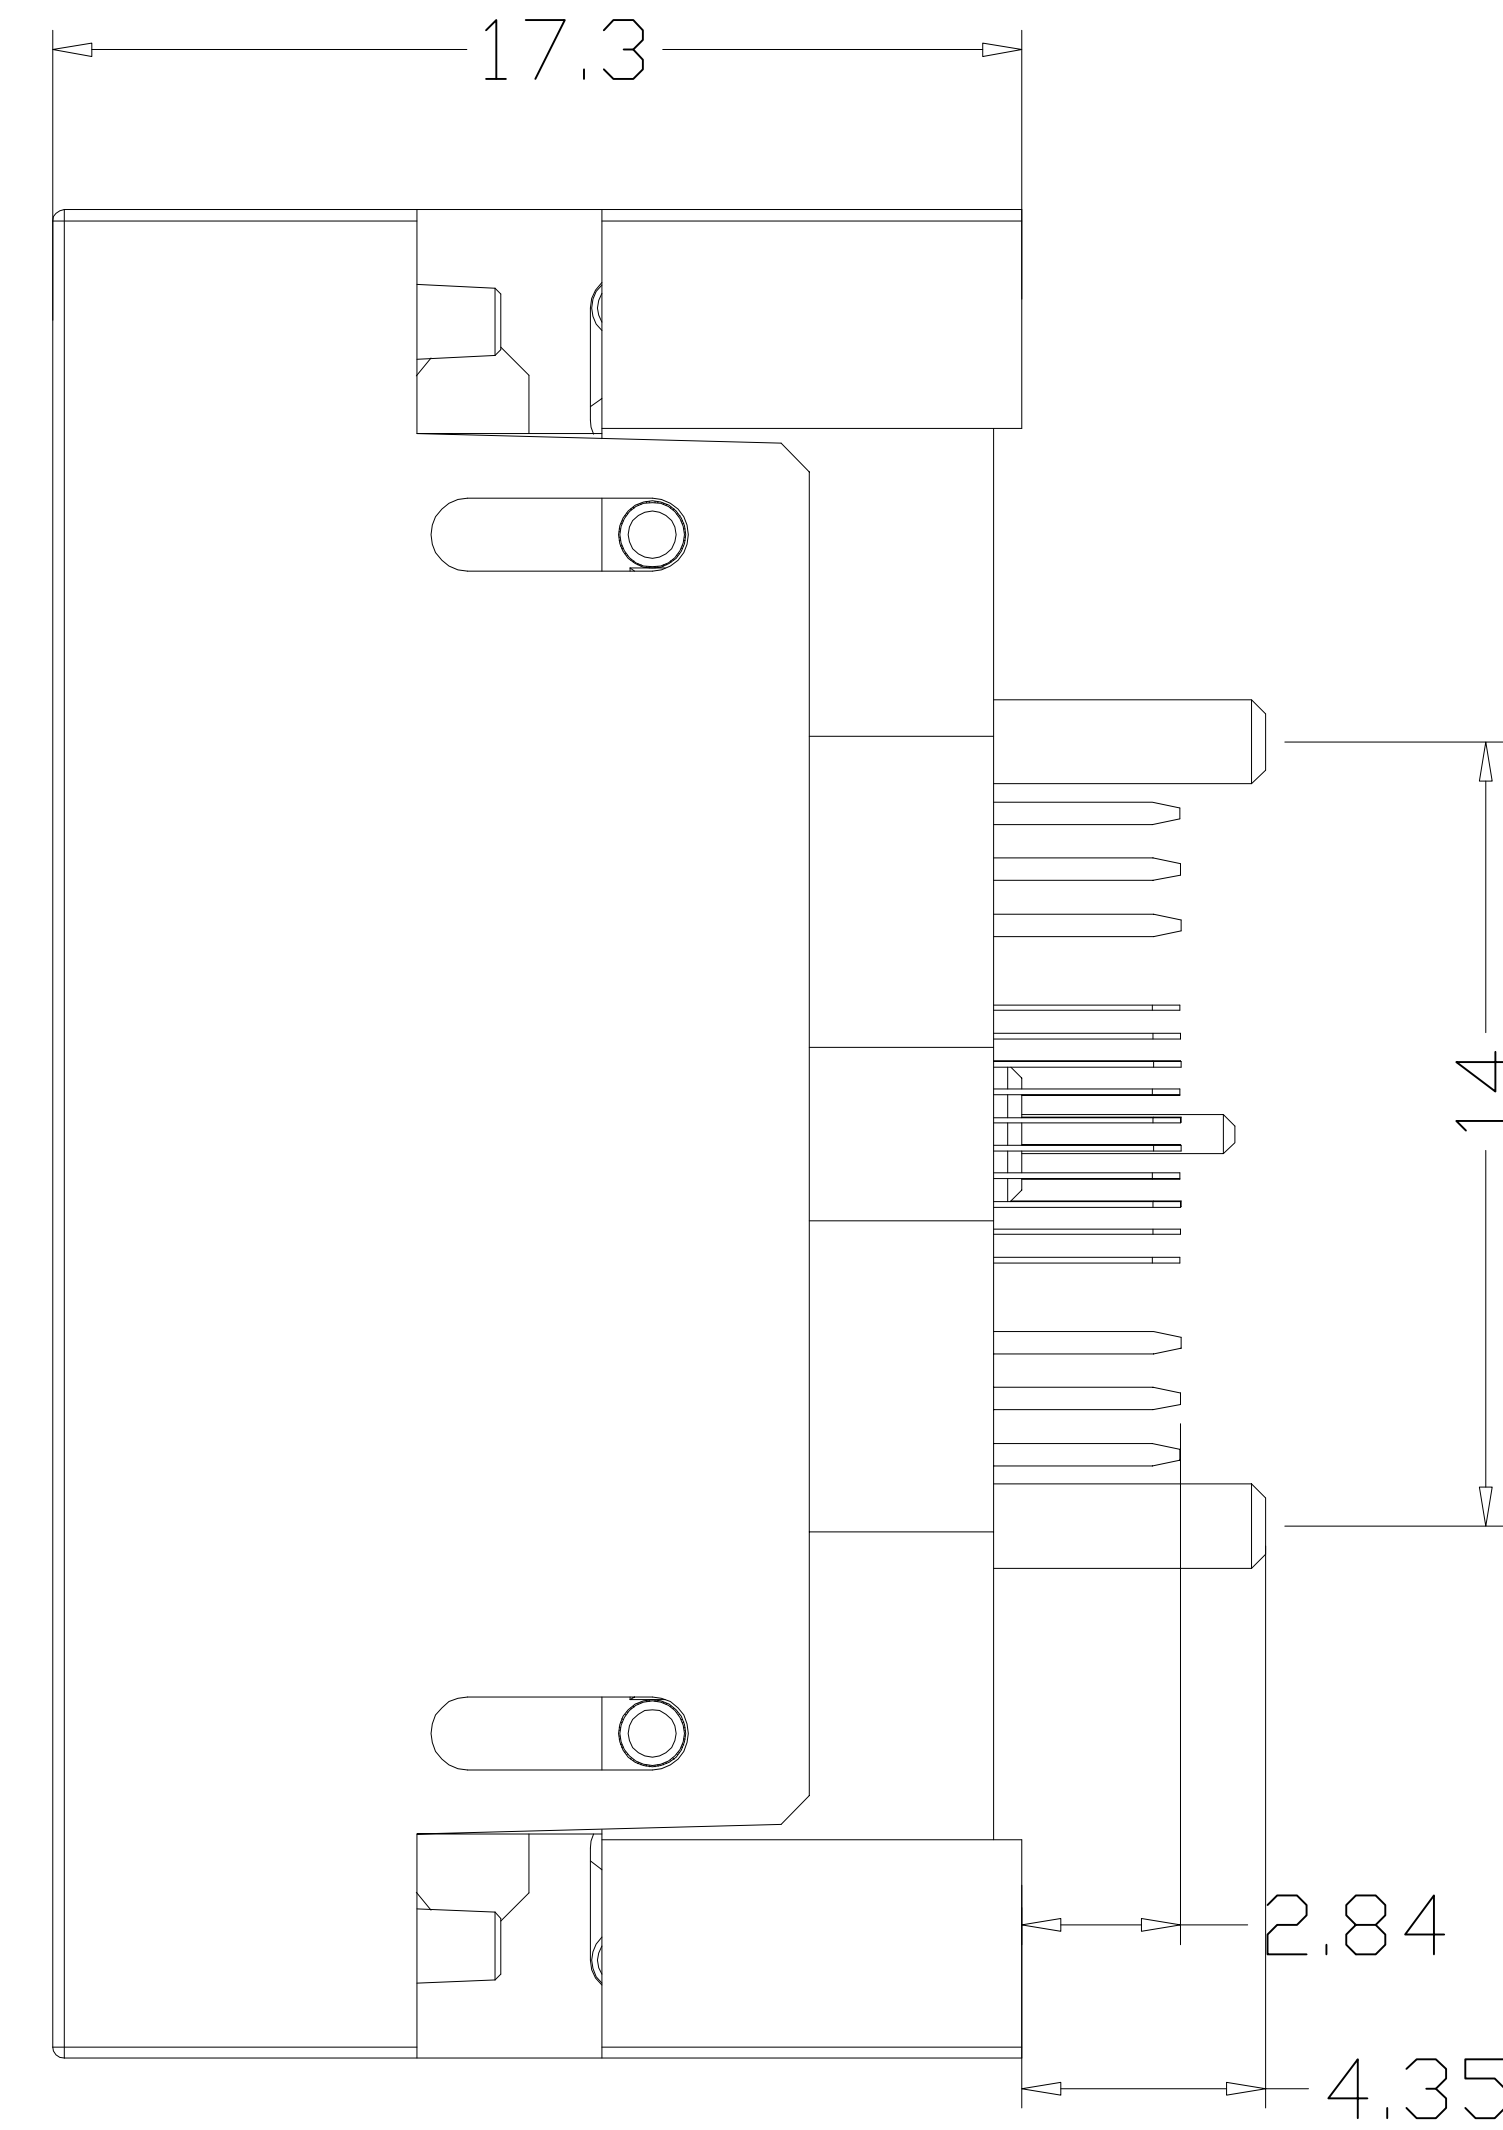



REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE. NO
△ 1					
△ 2					
△ 3					

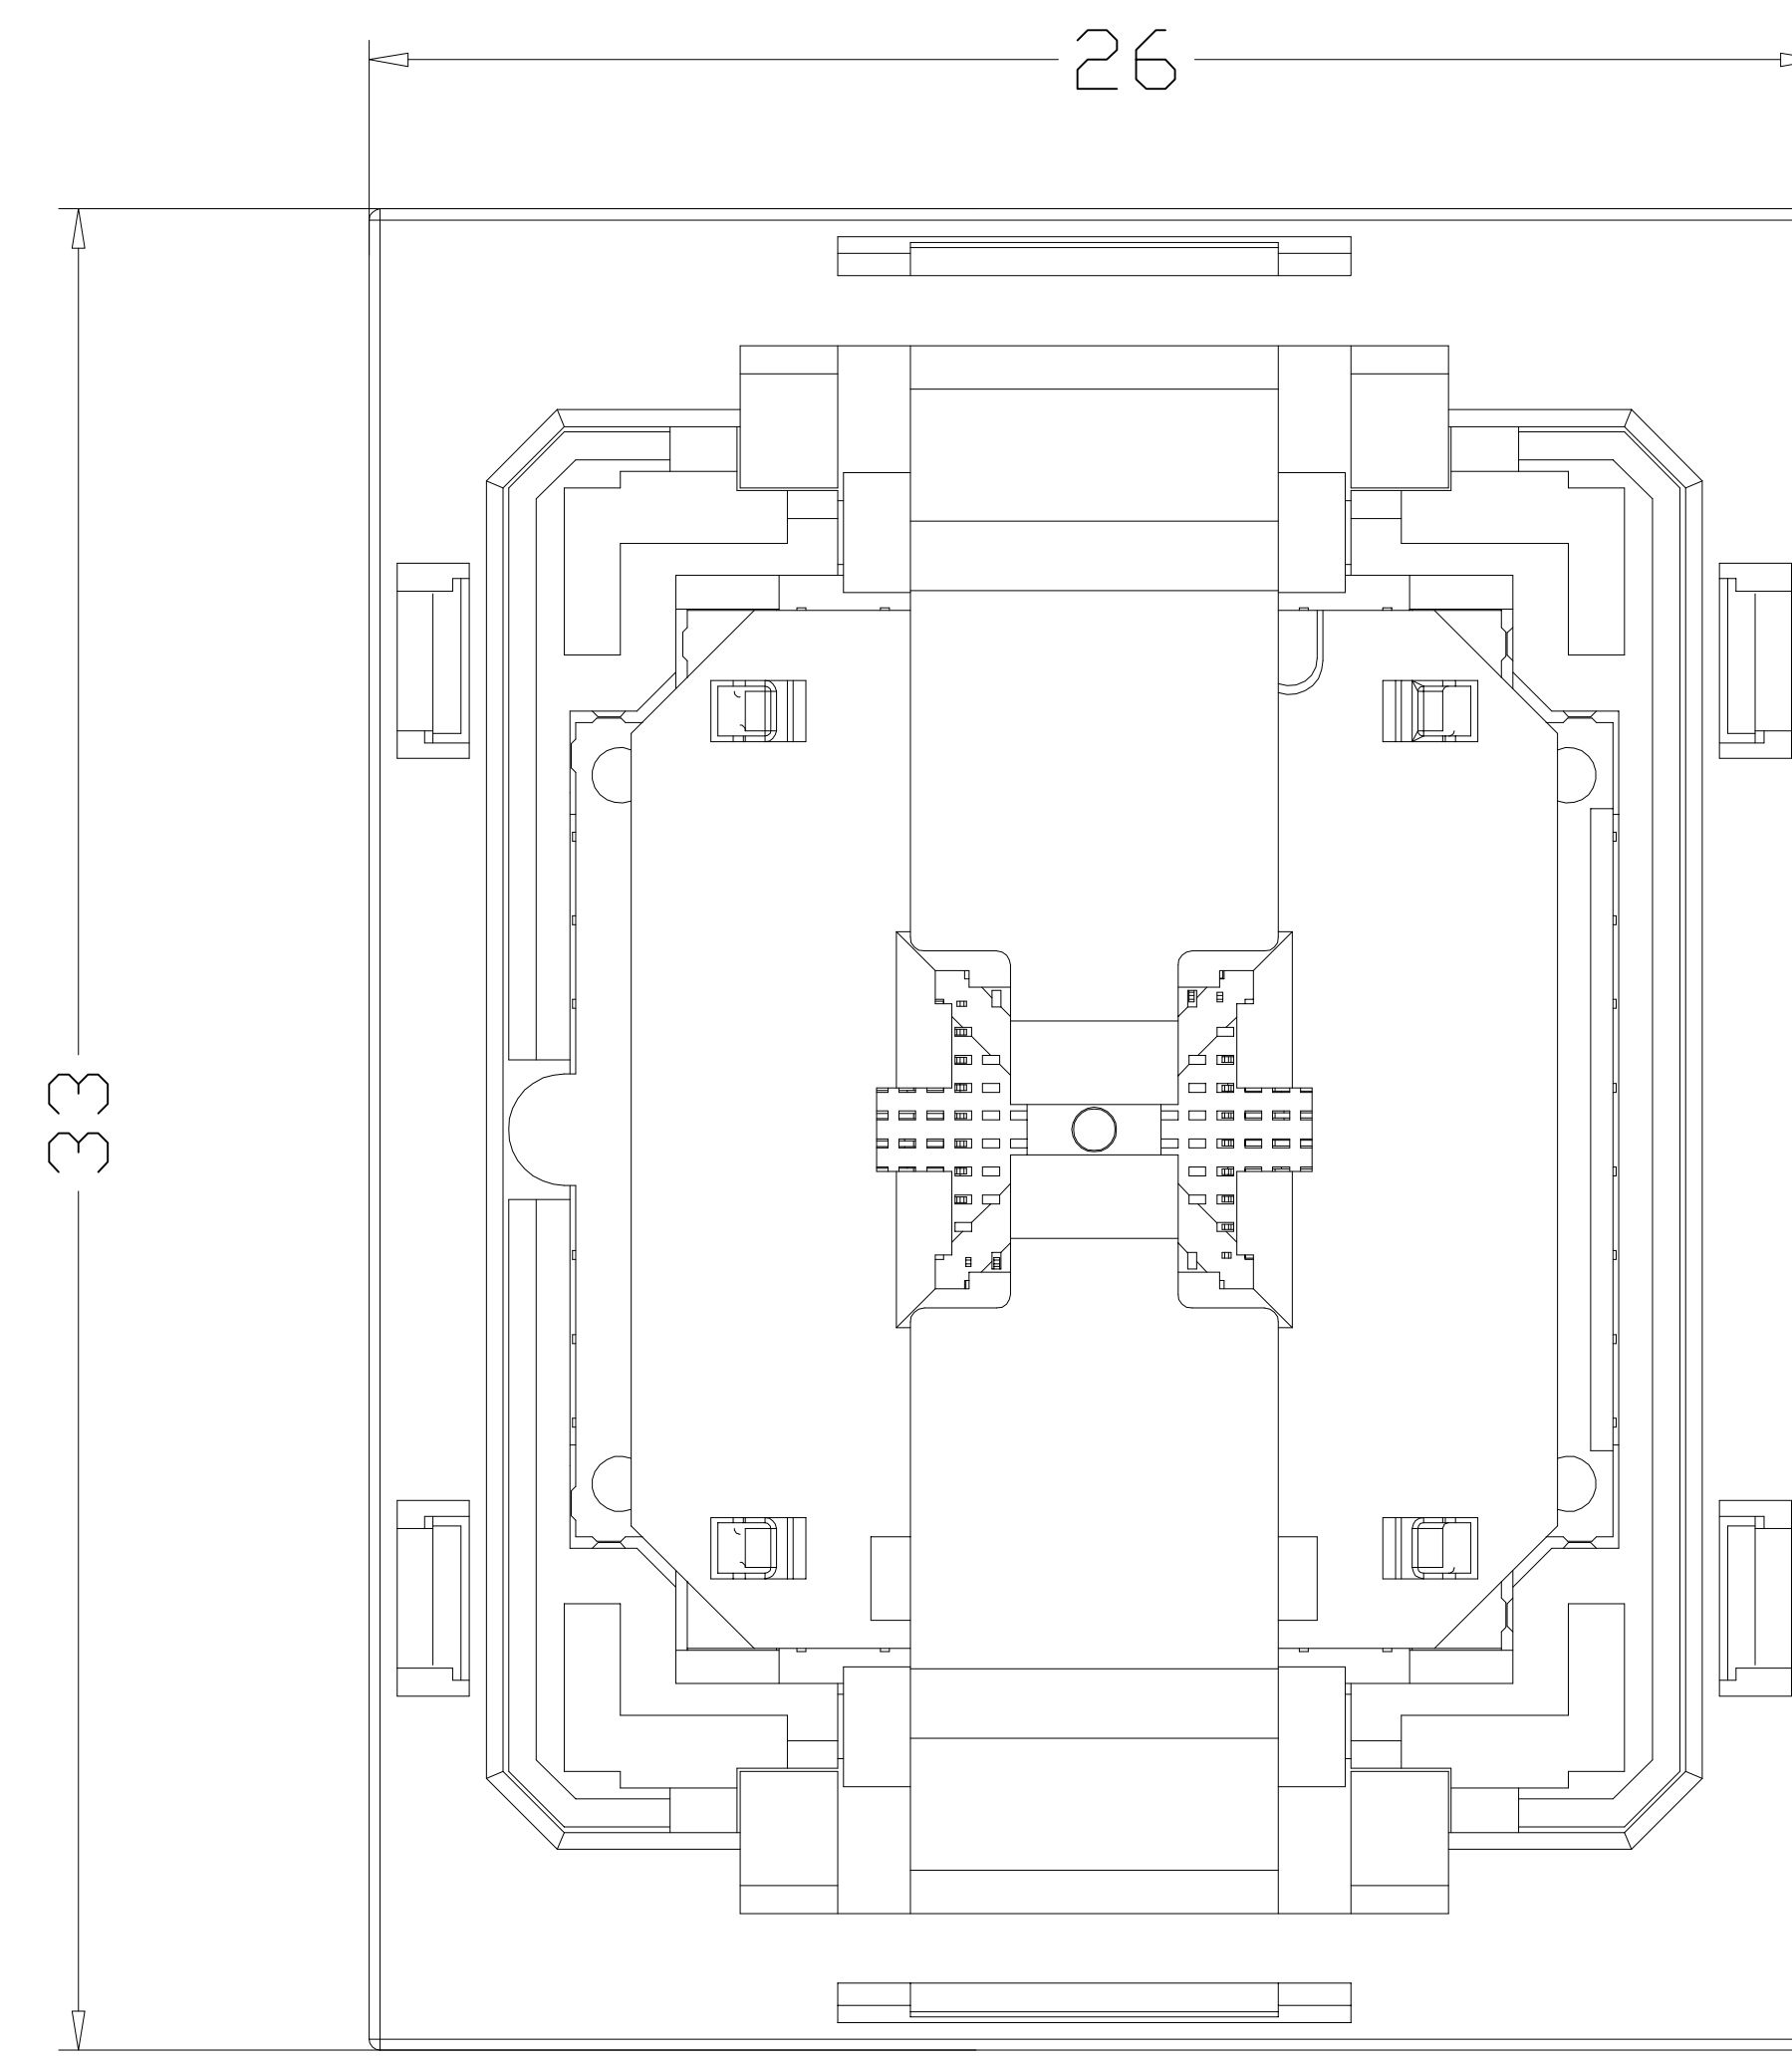


Applicable IC

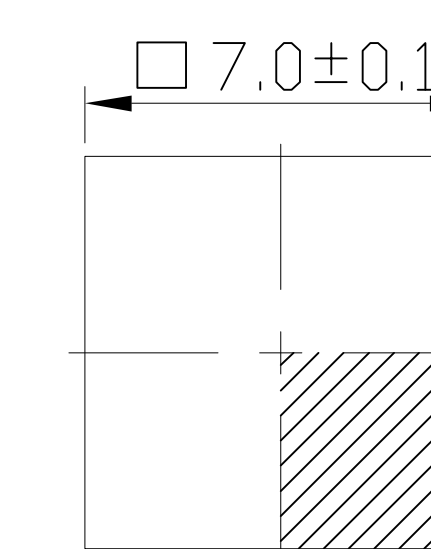

TOP VIEW

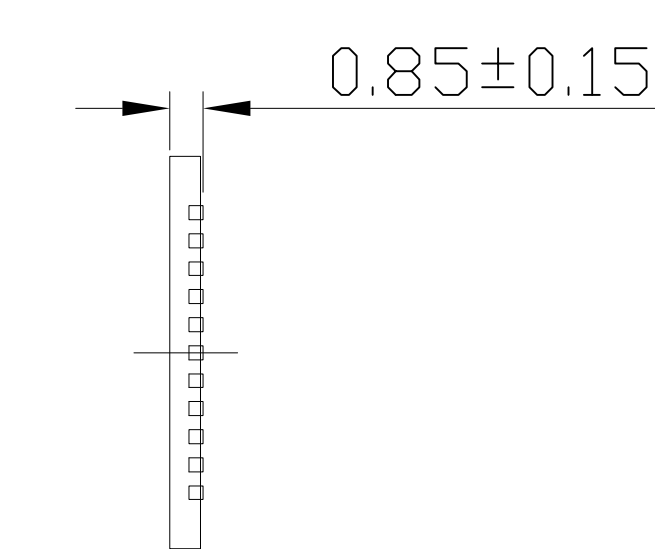

SIDE VIEW

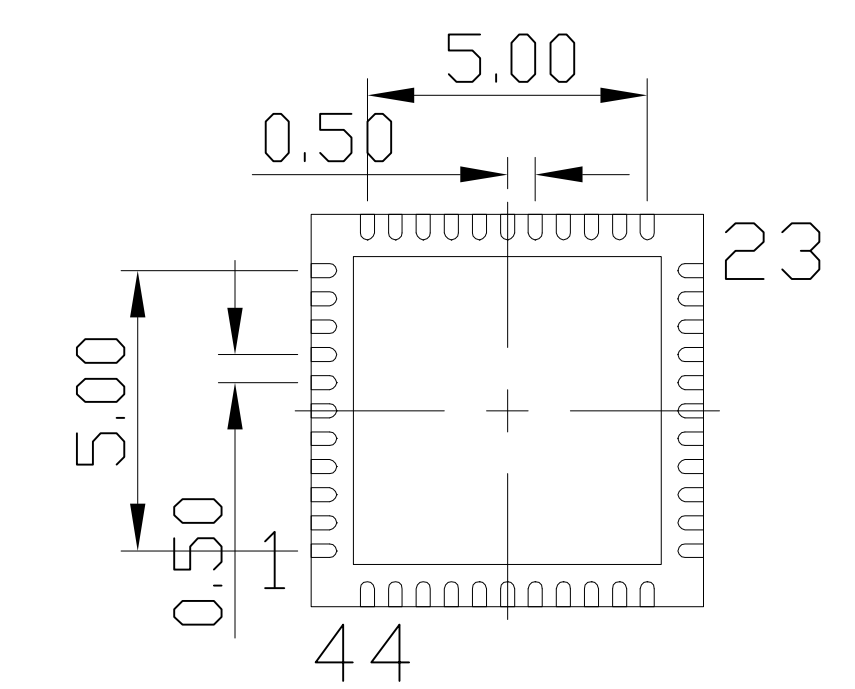

BOTTOM VIEW

PERFORMANCE

- 1、Insulation Resistance: 1000MΩ Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3、Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX.(Initial)
- 4、Current Rating: 1A max.
- 5、Operation Temperature -40°C ~+155°C
- 6、Life Span 15,000 Times (Mechanical)
- 7、Operation Force 2.0 Kg MAX

TOLERANCE	PROJECTION	GENERAL TOLERANCES	±0.10	TITLE	QFN44-0.5 SOCKET
R E V <td>mm</td> <td>SCALE:</td> <td>A</td> <td>CLASS</td> <td>QFN44-0.5-TP01GT</td>	mm	SCALE:	A	CLASS	QFN44-0.5-TP01GT
X. ± 0.50	DIMENSION:	SCALE:	1:1	DRW. NO	7L-PWQFN-0.5-44-7X7-01
X. X ± 0.25	APP:	DATE:			
X. XX ± 0.10	CHECK:	DATE:			
X. XXX ± 0.05	DEGK: ENG03	DATE: 20150606			